

# WindSigns

Choose Snap Frame or Quick-Change™ Frame

## Snap Frame



- Snap open, place graphic, snap close
- Satin silver or gloss black frame
- PVC Clear Protective Cover
- Use indoors and out


Clear cover is provided to keep poster clean. When used outdoors, weatherproof sign material should be used.

## Quick-Change™ Frame

- Patented slot design – just slide in a sign
- All plastic frame
- "Stay Tabs" keep sign securely in place
- Use indoors and out



**New & Improved Base!**






Two Built-in Wheels  
All plastic base

### Improved Stability

- New wider base
- New spring channel lowers center of gravity
- New sand fill hole placement
  - now easier to fill
  - sand flows to outer corners increasing balance
- Additional feet on base, steadies unit on uneven ground


Coil springs resist strong winds and return the sign to an upright position.

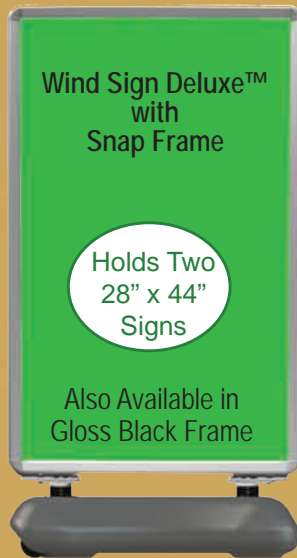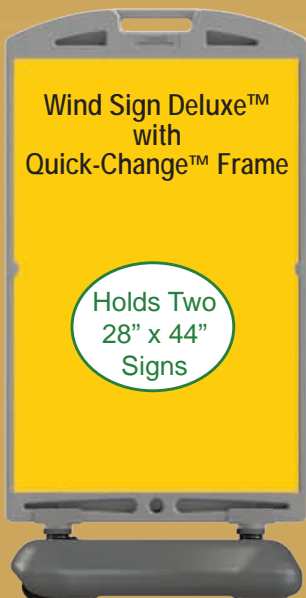


# Wind Signs

Specifications	Wind Sign Quick-Change™ Frame	Wind Sign II Quick-Change™ Frame	Wind Sign II Snap Frame	Wind Sign Deluxe™ Quick-Change™ Frame	Wind Sign Deluxe™ Snap Frame
<b>Color</b>	Gray	Gray	Satin Silver or Gloss Black Aluminum Frame with gray base	Gray	Satin Silver or Gloss Black Aluminum Frame with gray base
<b>Dimensions (Frame Only)</b>	24"W x 32.75"H	26"W x 42.9"H	26"W x 38"H	30"W x 51"H	30"W x 46"H
<b>Dimensions (Base Only)</b>	26"W x 4.5"H x 18"D	29.5"W x 6.25"H x 24"D	29.5"W x 6.25"H x 24"D	29.5"W x 6.25"H x 24"D	29.5"W x 6.25"H x 24"D
<b>Dimensions Assembled</b>	26"W x 40"H	29.5"W x 50.5"H	29.5"W x 40.5"H	30"W x 58.5"H	30"W x 54.5"H
<b>Total Weight Assembled</b>	16 lbs.	26 lbs.	30 lbs.	31 lbs.	34 lbs.
<b>Weight (Base Only)</b>	4.3 lbs.	10 lbs.	10 lbs.	10 lbs.	10 lbs.
<b>Base Sand Ballasting</b>	Use a max. of 85 lbs. of dry sand	Use a max. of 115 lbs. of dry sand	115 lbs. of dry sand is recommended	Use a max. of 115 lbs. of dry sand	115 lbs. of dry sand is recommended
<b>Sign Insert Size</b>	22" x 28" (3/16" thick max.)	24" x 36" (3/16" thick max.)	24" x 36" (3/16" thick max.)	28" x 44" (3/16" thick max.)	28" x 44" (3/16" thick max.)
<b>Sign Insert Weight Limit</b>	2.5 lbs. per side	5 lbs. per side	5 lbs. per side	5 lbs. per side	5 lbs. per side


Wind Sign




Wind Sign II Quick-Change™ Frame




Wind Sign Deluxe™ Quick-Change™ Frame



Wind Sign II Snap Frame

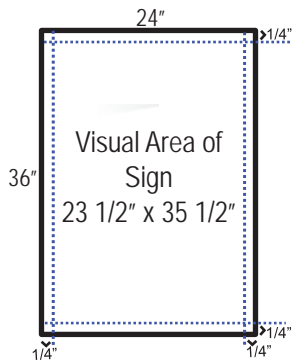

Wind Sign Deluxe™ Snap Frame

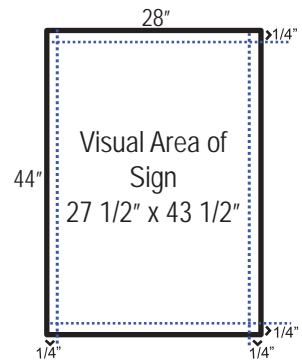

**Sand Ballasting Instructions**  
For Wind Sign Deluxe and Wind Sign II

Rest wheel side of base on step or block. Unscrew cap from fill hole and pour dry sand into base. Fill with sand to achieve desired wind resistance. Sand should be level inside of base to maintain optimum balance. Shake gently to level sand.

**To Obtain Desired Wind Resistance Use Chart**

Pounds of Ballast	Head-on Wind Resistance
70 lbs.	40 mph
100 lbs.	55 mph
115 lbs.	60 mph
130 lbs. maximum	

Sand Fill Hole  
Block

US PATENTS  
7,337,569  
8,646,196  
other patents pending

7700 Austin Avenue  
Skokie, IL 60077  
phone (800) 772-0355  
fax (847) 966-8074  
Plasticade.com



Slide in a Message Board...



Available for Wind Sign, Wind Sign II, and Wind Sign Deluxe™

or a Marker Board



Available for Wind Sign and Wind Sign II

