

Wind Sign II & Wind Sign Deluxe





www.plasticade.com


Quick-Change™ Frame Assembly Instructions

See Reverse Side for Snap Frame Instructions

Hardware Provided

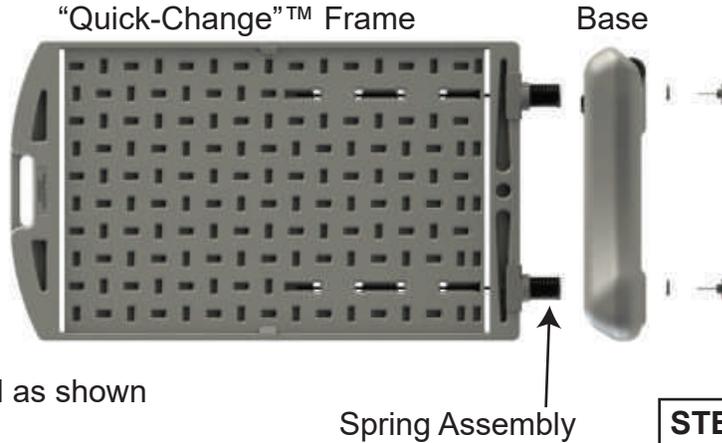


1. Lay frame on its side and base on end as shown
2. Place washer on bolt fastener
3. Insert bolt fastener through hole in bottom of base
4. Align spring assembly with bolt fastener
5. Screw bolt fastener into bottom of corresponding spring assembly, tighten
6. Repeat for second bolt fastener, washer, and spring assembly
7. Turn sign frame upright, with base flat on the ground
8. Take Allen wrench and tighten set screw inside silver collar on spring shaft, *silver collar should be placed at the lowest possible position on the spring shaft at the bottom of the opening*
9. Repeat for second set screw in silver collar

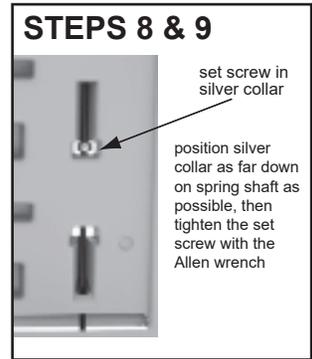


Sign Insertion Instructions

CAUTION: Sign Substrate should weigh no more than 5 lbs. per side.

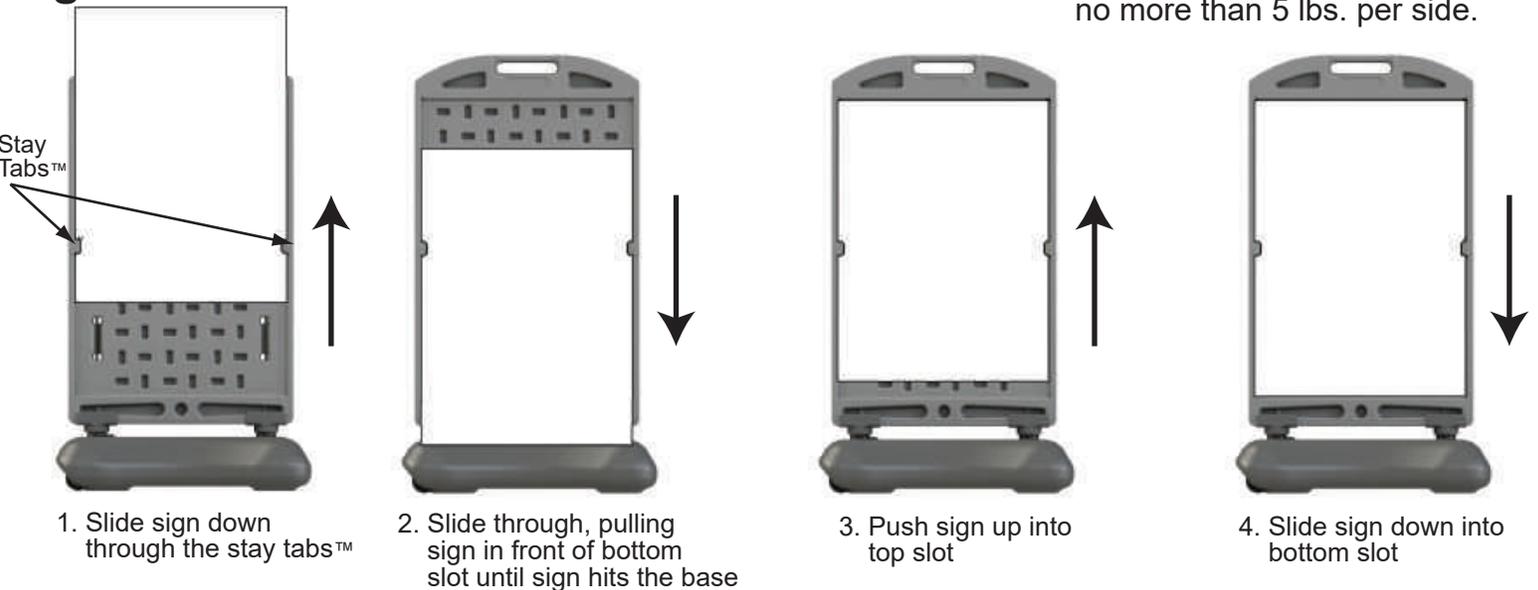

Instructions for Filling Base with Dry Sand

Rest wheel side of base on step or block. Unscrew cap from fill hole and pour dry sand into base. Fill with sand to achieve desired wind resistance. Sand should be level inside of base to maintain optimum balance. Shake gently to level sand.



To Obtain Desired Wind Resistance Use Chart

Pounds of Ballast	Head-on Wind Resistance
70 lbs.	40 mph
100 lbs.	55 mph
115 lbs.	60 mph
130 lbs. maximum	

To move sign stand from place to place - grab handle, tilt stand back on wheels, and push sign to move it.

