

Simpo[®] Square 20

Simpo[®] Square 24

PLASTICADE[®]

- Quick-Change[™] feature
 - change signs in seconds
 - use rigid signs 3/16" thick or less
- "Stay Tabs" assure sign stays securely in place
- Grabber Hinges hold a top rider
 - keep frame from opening too far
- Textured feet
 - help to secure frame on smooth surfaces
 - dig into soft ground or gravel
- No rust, no maintenance
 - all plastic, use indoors and out
- Internally weight with dry sand



Grabber Hinges grip Top Rider, quickly holding it in place

New Size



Simpo® Square 20

Sign Blank Size: 20"W x 20"H

Outside Dimensions: 22"W x 26.4"H

Closed Thickness: 2"

Weight: 5.5 lbs.


Colors: White and Black

Simpo® Square 20

Holds Signs

20"W x 20"H

(up to 3/16" thick)

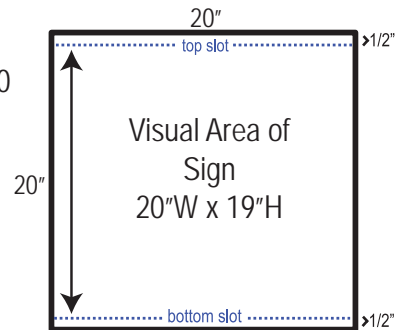

Simpo® Square 24

Sign Blank Size: 24"W x 24"H

Outside Dimensions: 26"W x 32.3"H

Closed Thickness: 2"

Weight: 7 lbs.


Colors: White and Black

Simpo® Square 24


Holds Signs

24"W x 24"H


(up to 3/16" thick)

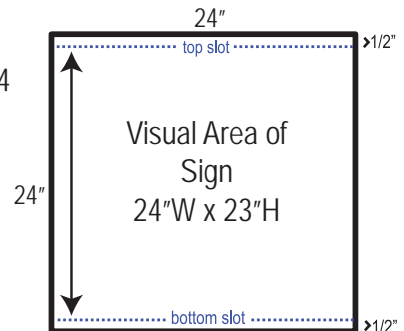


Sign Insertion Instructions:




1. Slide sign down through the tabs



2. ...until sign rests on ground



3. Push sign up into slot



4. Slide sign down into bottom slot

Sign Rider Insertion Instructions:

Stand the sign frame on the ground, spreading open the sign faces only half way. Place the Sign Rider in the hinge openings between the sign faces. Now, move the sign faces apart until fully extended. The hinges will "grab" the Sign Rider.




PLASTICADE®

100 Howard Avenue
Des Plaines, IL 60018
phone (800) 772-0355
fax (847) 966-8074
Plasticade.com

MADE IN THE USA
US PATENT 7,337,569



Sand Ballasting Instructions



Sand Fill Hole

Each sign frame has two fill holes, one on each half of the frame.

Remove plug from fill hole and fill each hole with dry sand. 3 lbs. of sand per hole for a total of 6 lbs. per sign frame is recommended.