

# SimpoSign® II

PLASTICADE®




22" x 28"  
Signs



- Holds two signs 22"W x 28"H (55.88 cm x 71.12 cm)
- Change signs in seconds
  - Quick-Change™ feature, signs slide in and out
  - no tape, hook and loop fastener, or screws needed
  - use rigid sign material 3/16" (4.78 mm) thick or less
- No maintenance, all plastic, use indoors and out
- Grabber Hinges hold a Sign Rider
  - keep frame from opening too far
- Stabilizing Brace prevents accidental spreading or closing of sign panels
- Textured feet
  - help to secure frame on smooth surfaces
  - dig into soft ground or gravel
- Stay Tabs™ ensure signs stay securely in place
- Stacking lugs keep stacked units from sliding
- Can internally weight with up to 6 lbs. (2.7 kg) of dry sand
- Available in white and black, custom colors available with min. order qty.
- Made in the USA



Patented slot design  
- just slide in a sign  
or a message board  
or a marker board



Stay Tabs™ keep signs  
securely in place

# SimpoSign® II

Outside Dimensions: 24.375"W x 37.25"H x 2"D (61.91 cm x 94.62 cm x 5.08 cm)

Dimensions of Recessed area: 22.25"W x 27"H (56.52 cm x 68.58 cm)


Weight: 10 lbs. (4.536 kg)

Colors: White and Black, Custom Colors Available

Use rigid sign blanks up to 3/16" (4.78 mm) thick, including corrugated sheet (4 mm), foam board, and aluminum.



Scan For Video Instructions

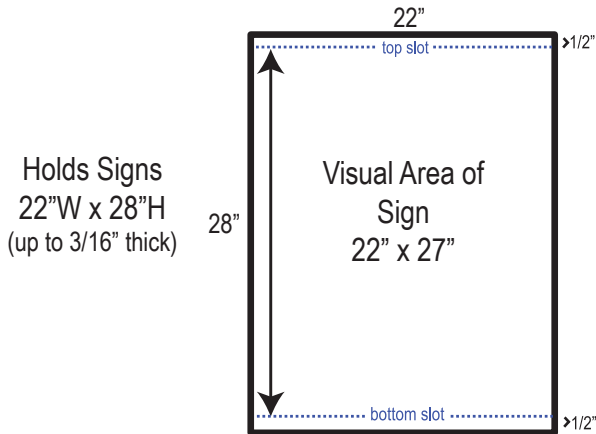

## Sign Rider Insertion Instructions:

Stand the sign frame on the ground, spreading open the sign faces only half way. Place the Sign Rider in the hinge openings between the sign faces. Now, move the sign faces apart until fully extended. The hinges will "grab" the Sign Rider.



## Stabilizing Brace Instructions

Prevents accidental or intentional spreading of sign faces too far. Can also be used for sandbagging. To store, just click into receptacle on back of sign frame.

Stabilizing Brace snaps into back side of frame for storage

Insert Brace in holes at bottom of the frame for set up



**MADE IN THE USA**

U.S. Patents #7,337,569 and #7,302,770

**PLASTICADE®**

100 Howard Avenue  
Des Plaines, IL 60018  
phone (800) 772-0355  
info@plasticade.com  
Plasticade.com



HDPE

## Sand Ballasting Instructions



Sand Fill Hole

Each sign frame has two fill holes, one on each half of the frame.

Remove plug from fill hole and fill each hole with dry sand. 3 lbs. of sand per hole for a total of 6 lbs. (2.7 kg) per sign frame is recommended.