


WindSigns

Choose Snap Frame or Quick-Change™ Frame

Snap Frame




- Snap open, place graphic, snap close
- Satin silver frame
- PVC Clear Protective Cover
- Use indoors and out

Clear cover is provided to keep poster clean. When used outdoors, weatherproof sign material should be used.

Quick-Change™ Frame

- Patented slot design - just slide in a sign
- All plastic frame
- "Stay Tabs" keep sign securely in place
- Use indoors and out





Two Built-in Wheels

All plastic base

Improved Stability


- New wider base
- New spring channel lowers center of gravity
- New sand fill hole placement
 - now easier to fill
 - sand flows to outer corners increasing balance
- Additional feet on base, steadies unit on uneven ground

Coil springs resist strong winds and return the sign to an upright position.

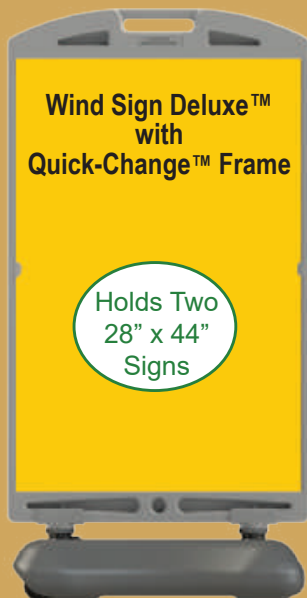

Wind Sign Deluxe™ with Quick-Change™ Frame

Holds Two 28" x 44" Signs

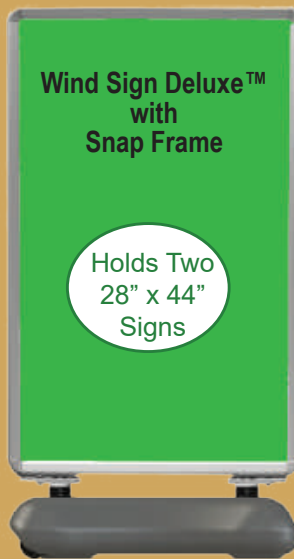


Wind Sign Deluxe™ with Snap Frame

Holds Two 28" x 44" Signs



Wind Sign II with Quick-Change™ Frame

Holds Two 24" x 36" Signs

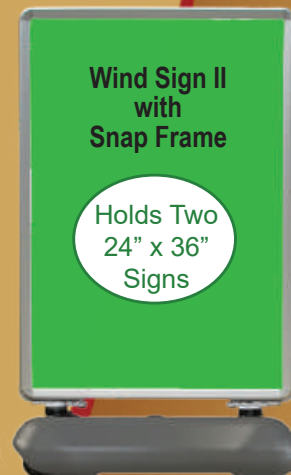


Wind Sign II with Snap Frame

Holds Two 24" x 36" Signs


WindSigns

Specifications	Wind Sign II "Quick-Change"™ Frame	Wind Sign II Snap Frame	Wind Sign Deluxe™ "Quick-Change"™ Frame	Wind Sign Deluxe™ Snap Frame
Color	Gray	Satin Aluminum Frame with Gray Base	Gray	Satin Aluminum Frame with Gray Base
Dimensions (Frame Only)	26"W x 42.9"H x 2.5"D	26"W x 38"H x 1.3"D	30"W x 51"H x 2.5"D	30"W x 46"H x 1.3"D
Dimensions (Base Only)	29.5"W x 6.25"H x 24"D	29.5"W x 6.25"H x 24"D	29.5"W x 6.25"H x 24"D	29.5"W x 6.25"H x 24"D
Dimensions Assembled	29.5"W x 50.5"H	29.5"W x 40.5"H	30"W x 58.5"H	30"W x 54.5"H
Total Weight Assembled	26 lbs.	30 lbs.	31 lbs.	34 lbs.
Weight (Base Only)	10 lbs.	10 lbs.	10 lbs.	10 lbs.
Base Sand Ballasting	Use a max. of 115 lbs. of dry sand	Use a max. of 115 lbs. of dry sand	Use a max. of 115 lbs. of dry sand	Use a max. of 115 lbs. of dry sand
Sign Insert Size	24" x 36" (3/16" thick max.)	24" x 36" (3/16" thick max.)	28" x 44" (3/16" thick max.)	28" x 44" (3/16" thick max.)
Sign Insert Weight Limit	5 lbs. per side	5 lbs. per side	5 lbs. per side	5 lbs. per side


Wind Sign II
Quick-Change™ Frame




Wind Sign Deluxe™
Quick-Change™ Frame



Wind Sign II
Snap Frame

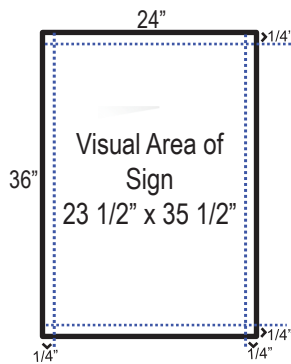


Wind Sign Deluxe™
Snap Frame

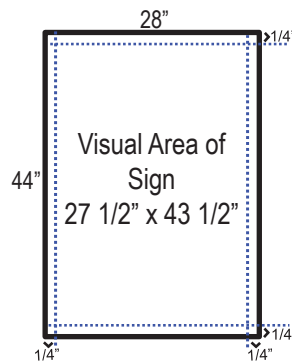

Sand Ballasting Instructions

Rest wheel side of base on step or block. Unscrew cap from fill hole and pour dry sand into base. Fill with sand to achieve desired wind resistance. Sand should be level inside of base to maintain optimum balance. Shake gently to level sand.

To Obtain Desired Wind Resistance Use Chart



Pounds of Ballast	Head-on Wind Resistance
70 lbs.	40 mph
100 lbs.	55 mph
115 lbs.	60 mph
130 lbs.	maximum

US PATENTS
7,337,569
8,646,196

100 Howard Avenue
Des Plaines, IL 60018
phone (800) 772-0355
info@plasticade.com
Plasticade.com



Slide in a
Message
Board...

Available for Wind Sign,
Wind Sign II, and
Wind Sign Deluxe™



or a Marker
Board

Available for Wind Sign
and Wind Sign II

