

PLASTICADE™ U-CHANNEL ADAPTER KIT ASSEMBLY INSTRUCTIONS

For 30 lb. and 60 lb. Recycled Rubber Sign Bases

Hardware Provided

- 2 ea. 1/4" x 20 x 2" pan head bolts
- 4 ea. 1/4" washers
- 2 ea. 1/4" x 20 hex nuts

Required Tools:

- Hammer
- 7/16" wrench



Not Provided:

- Hardware To Attach Sign:
- 2 ea. 1/4" X 20 X 1 1/2" bolts
 - 4 ea. 1/4" washers
 - 2 ea. 1/4" x 20 hex nuts

INSTRUCTIONS

1. Turn rubber base upside down on flat surface.
2. Using a hammer, pound the metal U-Channel adapter through the center hole until it bottoms out.
3. Turn the base over and pound the square plate against the ground, using the weight of the rubber base to drive the adapter flush with the bottom of the base.
4. Attach U-Channel to the adapter using the hardware provided. Place one bolt in a hole at the top of the adapter and the second bolt at the bottom of the adapter. Use two washers per bolt, placing one on each side of the U-Channel adapter.

Hardware provided

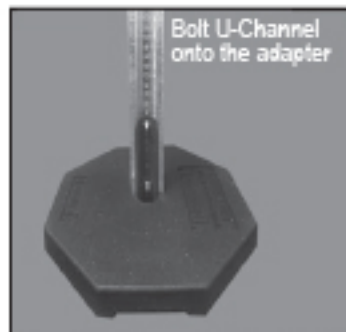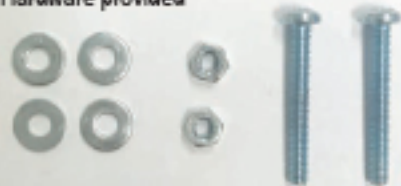

PLASTICADE™

Plasticade.com

Part #8296